
THE PaneLite SERIES



High Efficacy Panel Lights by SAMUDRA LED



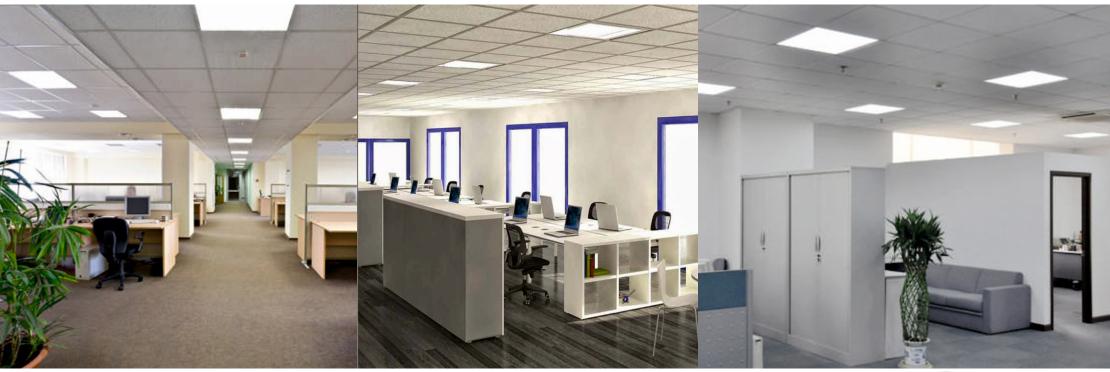

SIMPLE AND UNPRETENTIOUS, SAMUDRA PANELITE'S EASE OF MAINTENANCE AND UNBEATABLE FUNCTIONAL PERFORMANCE MAKES IT A DECIDED CHOICE FOR LIGHTING UP OFFICE AND OTHER INDOOR SPACES.

For a greener and brighter today!

Inspire.Innovate.Illuminate

Sensible Lighting Solutions by Samudra LED



PANELITE Series	
Specifications	SAM PL 2*2 BL X P34
Power	34 Watt
Input Voltage	AC 100 - 270 V 50/60Hz
PF	> 0.93
ССТ	2400 - 6000K
Luminous Flux (Lm)	3310
System Efficacy	98 Lm/W
Surge Protection	Up to 1 KV
CRI	80
Dimensions	595 x 595 x 55 mm
Net Weight	~ 4.5 Kg
Life Span	> 50000 hrs.
Certifications/Test Reports	ROHS / LM79

Features:

- 1. An ideal replacement for 72 watt 2*2 conventional fixtures.
- 2. Removable front panel for ease of maintenance.
- 3. Uniform & even light spread.
- 4. Easy to install.
- 5. Robust powder coated body for longer life.

Note:

- 1. X represent colour temperature. It is C: Cool white, W: Warm white & D: Day light.
- 2. Luminous Flux mentioned above is for CCT: 5000 5500K.
- 3. IES Files are available for all Samudra LED luminaires.
- 4. Samudra LED uses only LM80 Certified LEDs.
- 5. Customization possible based on project requirements and quantities.
- 6. Product /Product specifications are subject to change without prior intimation due to continuous upgradation in the LED light technology.



Samudra Electronic System Pvt. Ltd.

Corporate Office: 12, Electronic Sadan II, MIDC Bhosari, Pune – 411 026. Maharashtra, India. Phone: +91 20 27112485 ● E-mail: info@samudraled.com ● Website: www.samudraled.com